

Depth gauge


S_Depth EVO

DESCRIPTION

TWO FIXED MEASURING JAWS

- **Integrated Bluetooth® wireless technology**

- Special depth gauge with bridge 100mm and clamping screw
- Programmable button according to your needs
- Water protected for heavy-duty work with coolants and lubricants, protection rating IP67 according to IEC 60529,
- Automatic wake-up by moving the electronic on his frame. (Absolute System S.I.S)
- Sleeping mode after 10 min. of no use. (Absolute System S.I.S)
- Position memorized in sleeping mode, **Absolute System S.I.S***
- Maximum speed of displacement : 2.5 m/sec
- Mechanical frame in stainless steel, hardened and grinded

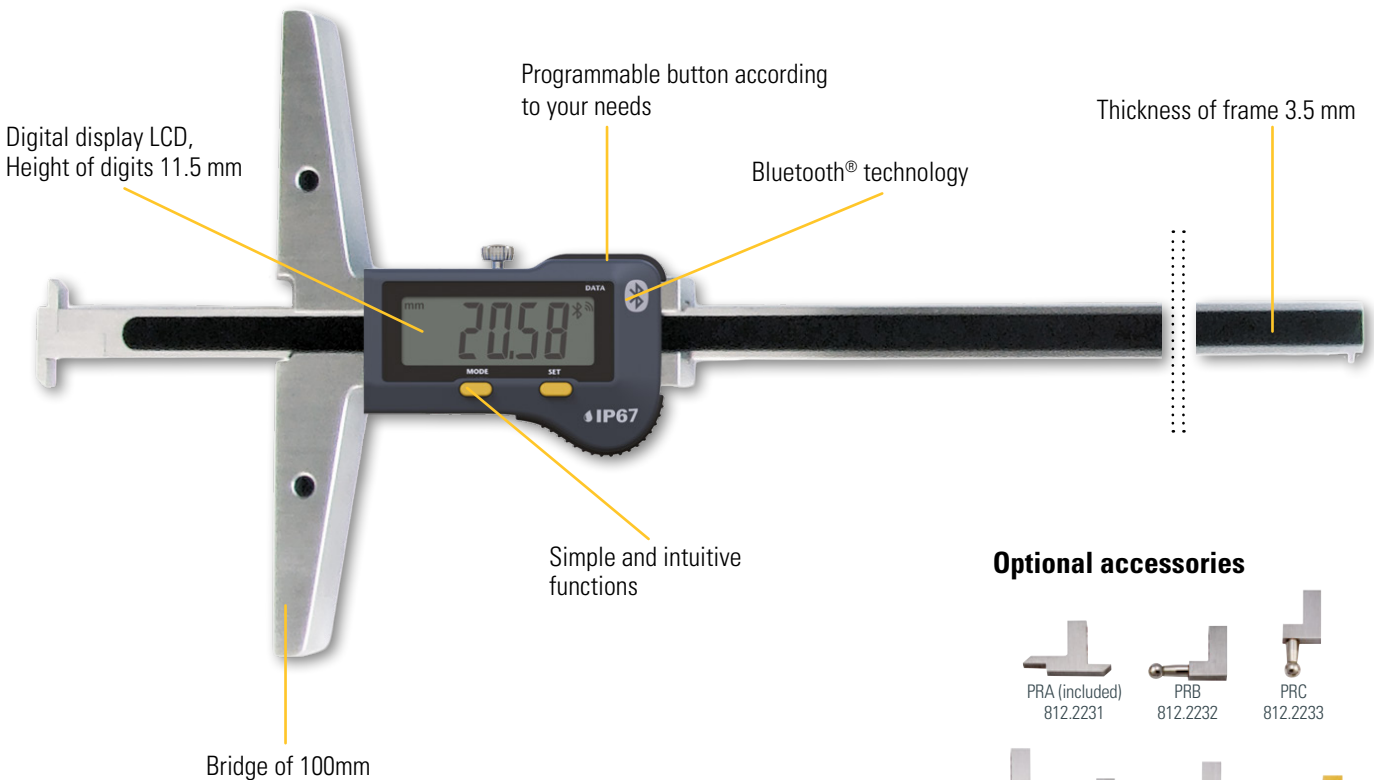

Optional accessories



* SIS description on page 5


Interchangeable anvils

Depth gauge


S_Depth EVO

DIMENSIONAL DRAWING


TWO FIXED MEASURING JAWS

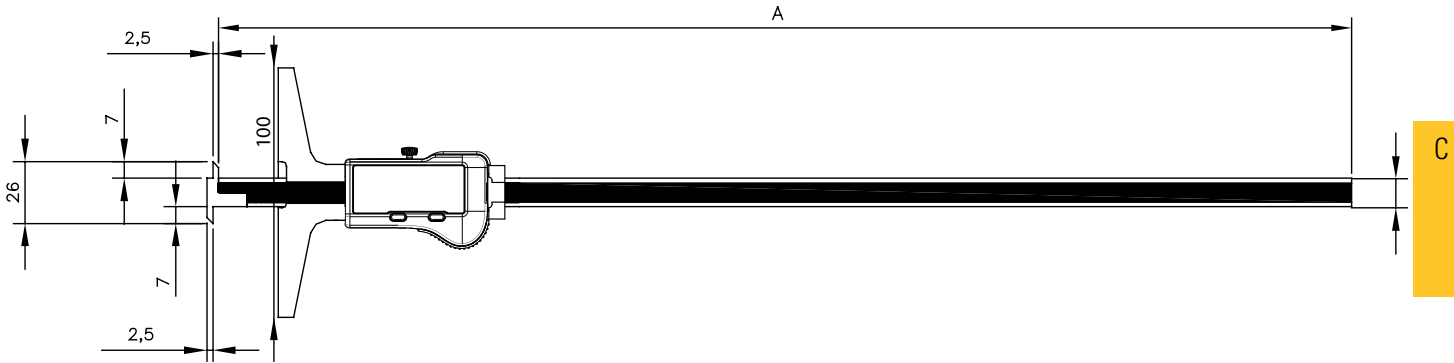


812.2231/812.2237




812.2232




812.2233





812.2234



812.2235



812.2236



TECHNICAL SPECIFICATIONS

		812.1601	812.1603	812.1605
Measuring range	mm	200	300	500
Max. Error	µm	30	30	50
Resolution	mm	0.01		
A	mm	300	400	600
B	mm	16x3.5		
Output data	Bluetooth® wireless technology*			
Functions	Zero setting, Preset (max 999.99), mm/inch, Hold, Data			
Smart Inductive Sensor	●			

* Up to 8 instruments connected per dongle #981.7100
 More informations on How to use Bluetooth® leaflet SYL_1401_EN_BT

Depth gauge


S_Depth EVO

DESCRIPTION

SHORTCUT MEASURING FACE

- **Integrated Bluetooth® wireless technology**

- Special depth gauge with bridge 100mm and clamping screw
- Programmable button according to your needs
- Water protected for heavy-duty work with coolants and lubricants, protection rating IP67 according to IEC 60529,
- Automatic wake-up by moving the electronic on his frame. (Absolute System S.I.S)
- Sleeping mode after 10 min. of no use. (Absolute System S.I.S)
- Position memorized in sleeping mode, **Absolute System S.I.S***
- Maximum speed of displacement : 2.5 m/sec
- Mechanical frame in stainless steel, hardened and grinded

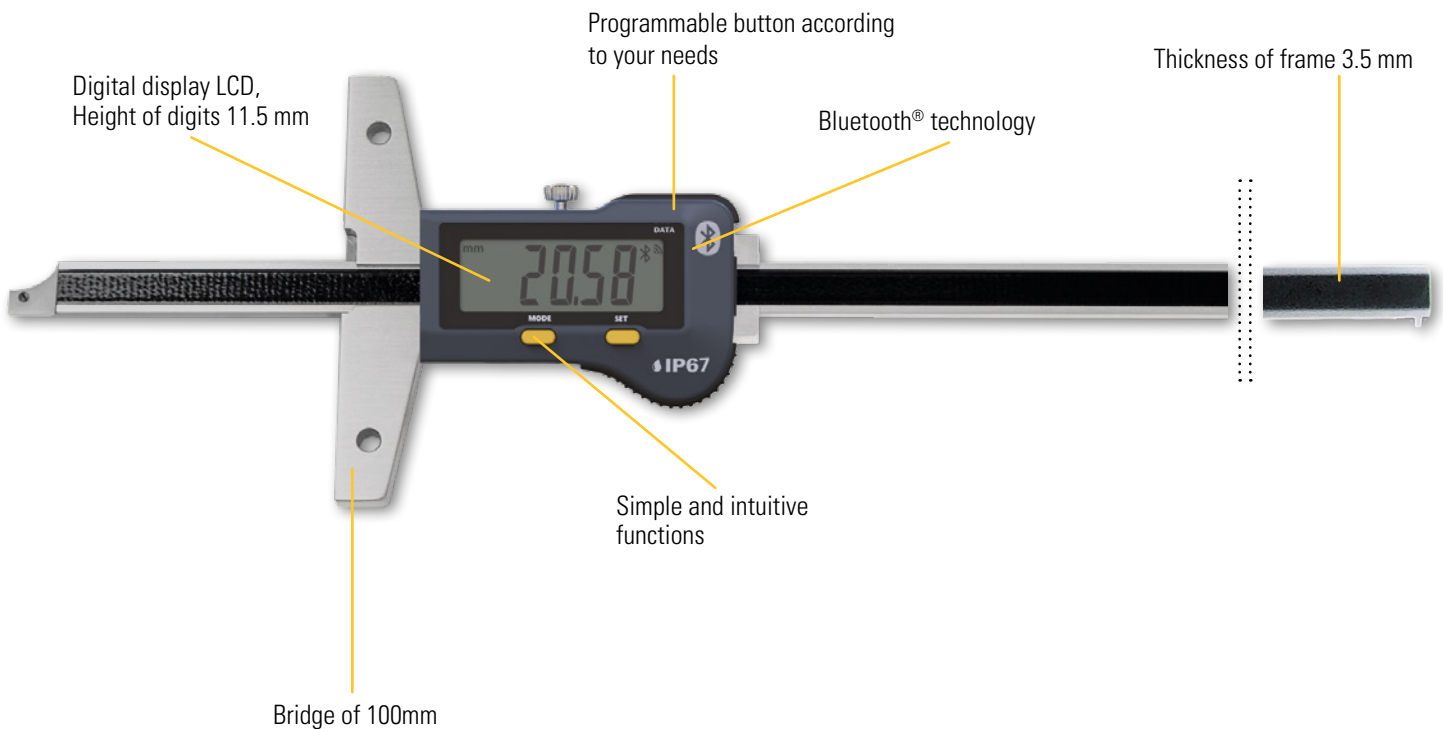

* SIS description on page 5


Bridge of 100mm with clamping screw

Depth gauge

S_Depth EVO

DIMENSIONAL DRAWING

SHORTCUT MEASURING FACE

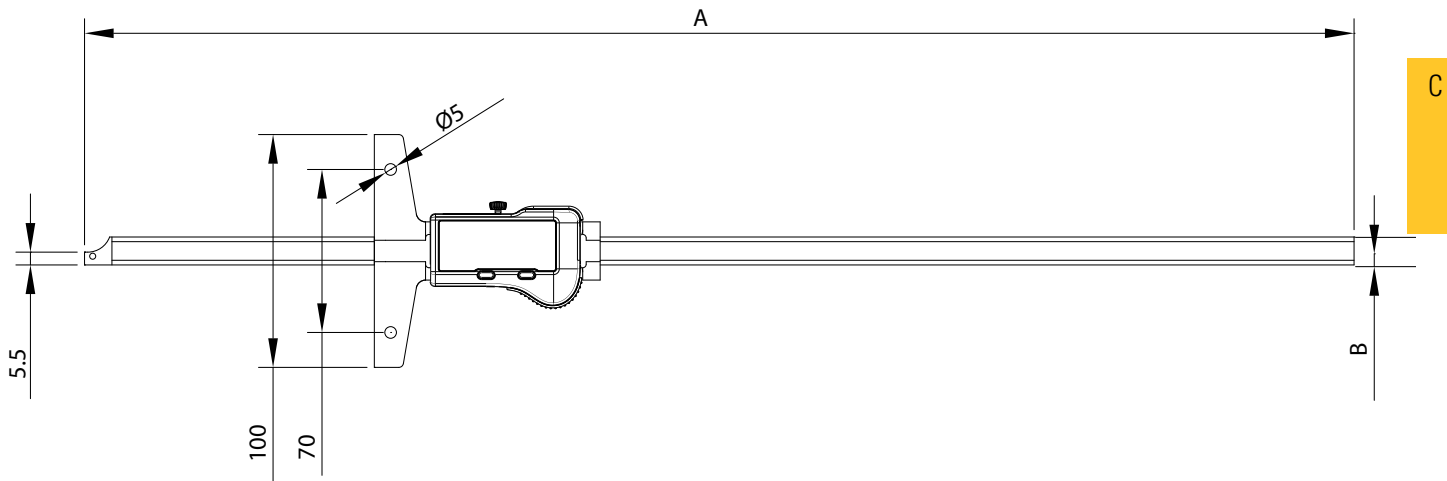

TECHNICAL SPECIFICATIONS

		812.1611	812.1613	812.1615
Measuring range	mm	200	300	500
Max. Error	µm	30	30	50
Resolution	mm	0.01		
A	mm	300	400	600
B	mm	16x3.5		
Output data		Bluetooth® wireless technology*		
Functions		Zero setting, Preset (max 999.99), mm/inch, Hold, Data		
Smart Inductive Sensor		●		

*** Up to 8 instruments connected per dongle #981.7100**
 More informations on How to use Bluetooth® leaflet SYL_1401_EN_BT

Depth gauge



S_Depth EVO

DESCRIPTION

ROTARY PIN

- **Integrated Bluetooth® wireless technology**

- Special depth gauge double with adjustable anvil and clamping screw
- Programmable button according to your needs
- Water protected for heavy-duty work with coolants and lubricants, protection rating IP67 according to IEC 60529,
- Automatic wake-up by moving the electronic on his frame. (Absolute System S.I.S)
- Sleeping mode after 10 min. of no use. (Absolute System S.I.S)
- Position memorized in sleeping mode, **Absolute System S.I.S***
- Maximum speed of displacement : 2.5 m/sec
- Mechanical frame in stainless steel, hardened and grinded

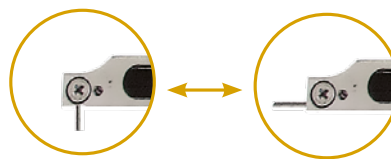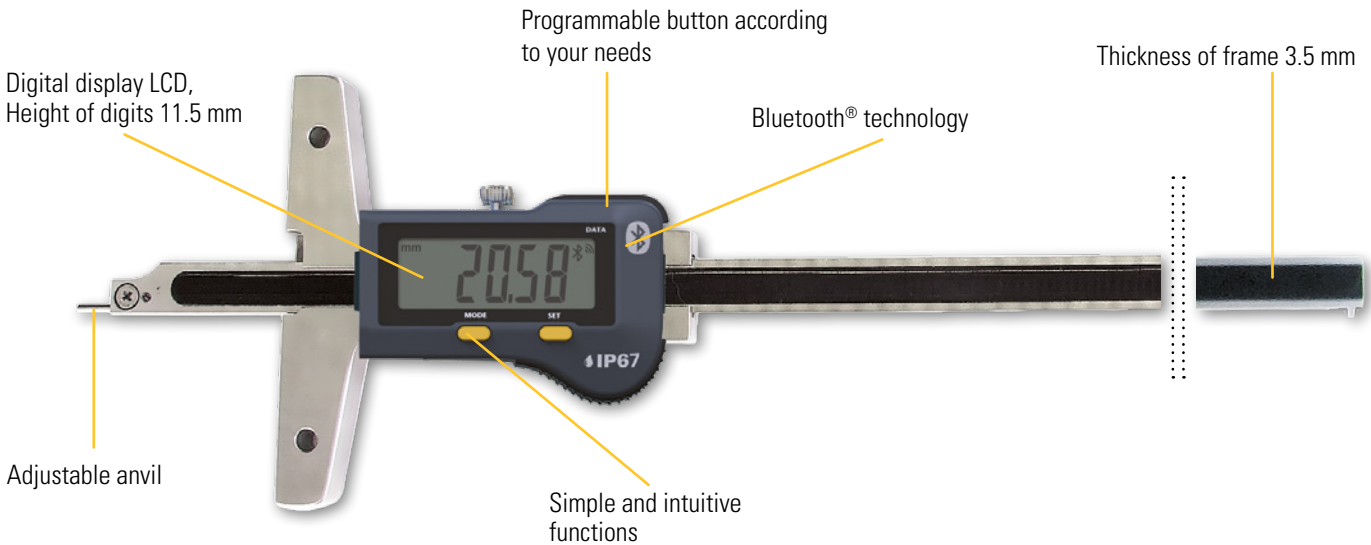

Adjustable anvil !



SIS Smart Inductive System



IP67


* SIS description on page 5

Depth gauge

S_Depth EVO

DIMENSIONAL DRAWING

ROTARY PIN

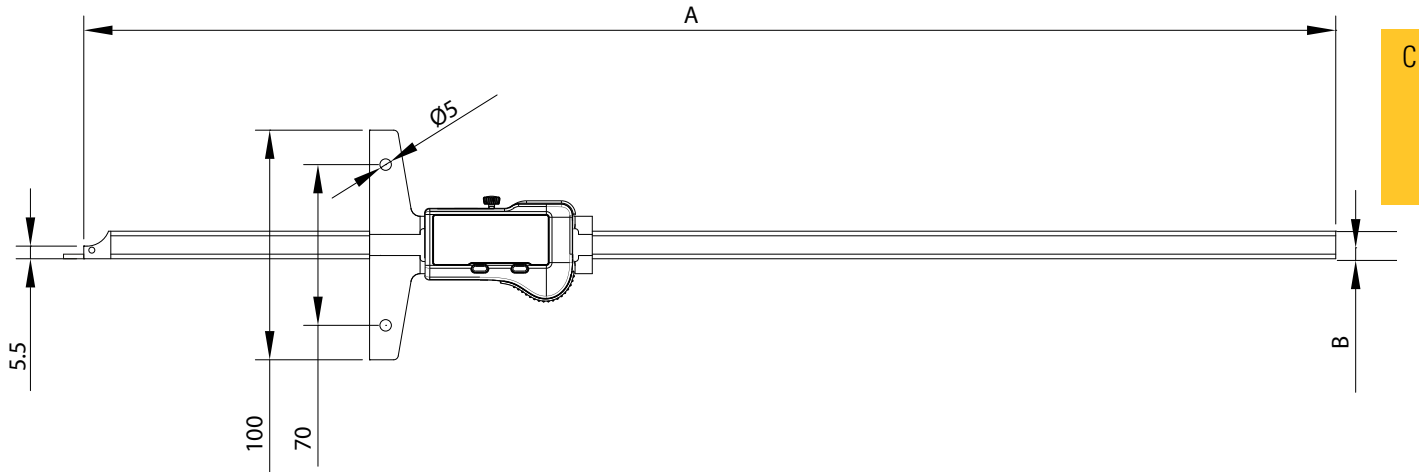

TECHNICAL SPECIFICATIONS

		812.1621	812.1623	812.1625
Measuring range	mm	200	300	500
Max. Error	µm	30	30	50
Resolution	mm	0.01		
A	mm	300	400	600
B	mm	16x3.5		
Output data		Bluetooth® wireless technology*		
Functions		Zero setting, Preset (max 999.99), mm/inch, Hold, Data		
Smart Inductive Sensor		●		

* Up to 8 instruments connected per dongle #981.7100
 More informations on How to use Bluetooth® leaflet SYL_1401_EN_BT